

Fod motorized drapery hardware

CENTER OPEN CONFIGURATION


BEFORE INSTALLATION, UNPACK BOX AND LAY OUT CONTENTS:



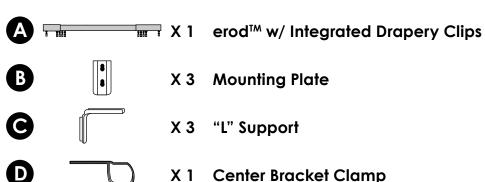

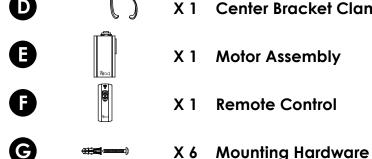

X 2 Rotating Side Bracket (attached to rod)





Care Instructions: Clean with a soft cloth. Do not use abrasive cleaning agents,


Estimated Assembly Time: Approximately 30 minutes

solvents, or polishes as they may damage the finish.


Tools Needed (not included): Drill with ³/₁₆ in drill bit, Phillips screwdriver, Level (recommended)

X 1 Rod Set Screw

How to Measure: To determine the appropriate drapery rod length, use a metal measuring tape to gauge the outside width of the window to be covered. Align ends of $erod^{TM}$ to outer edges of window.

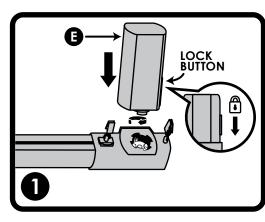


Lay erodTM on a flat surface with keyed slot facing upward. Insert motor assembly into keyed slot on rod end. Twist until gears are engaged and motor is seated into erodTM (lock button should align with stationary clip on end of rod). Slide lock button towards rod to lock motor assembly into place.

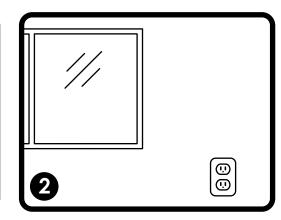


Find closest electrical outlets to window and decide which side of window to orient motor.

(Battery Power Kit sold separately for use without wall adaptor.)

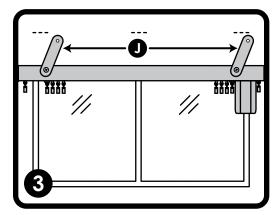


Extend rotating side brackets on erodTM toward wall and align ends of erodTM to outer edges of window. Using level and rotating side brackets, mark desired side and center mounting plate locations.

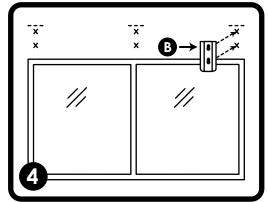


Align top of mounting plates to marked positions and mark hole positions. Make sure all 3 mounting plates are at the same horizontal level.


(NOTE: Some installations require special attachment methods and anchors. Only drywall anchors are supplied.)

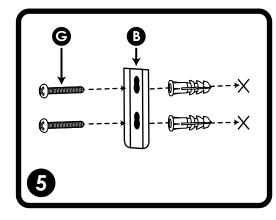


Drill anchor holes with $^3/_{16}$ inch drill bit and insert wall anchors. Attach mounting plates to wall using screws provided.

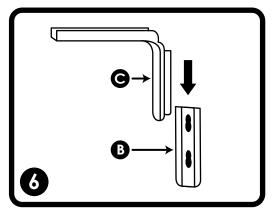


Slide "L" supports onto mounting plates.

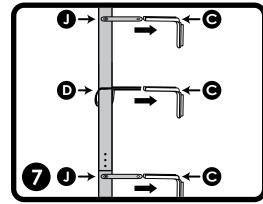


Place center bracket clamp near middle of erod™ and insert all three brackets into "L" supports on wall. Pinch center clamp tight onto rod and lock into place with top set screw.

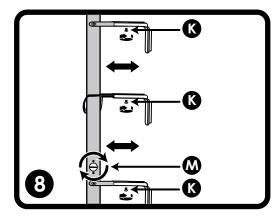

Determine the projection of the erod™ from the wall, then insert and tighten bracket set screws on bottom of all 3 brackets to secure. Place rod set screw in middle hole (of the three on top of rod). Use a coin to tighten rod set screw.

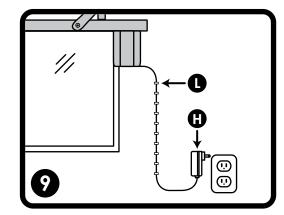


Plug wall adaptor into electrical outlet. Use cord guides to secure cord to wall.

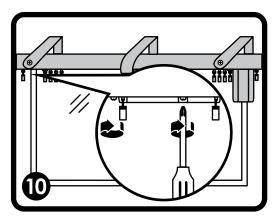


To set center drapery position:

[a] Press < I > button to open erodTM to its outermost position (only one carrier will move). [b] Slide loose carrier to outermost position (away from the motor) and tighten both carrier screws to lock in place. Press > I < button and close erodTM to its center position. The center drapery position on your erodTM is now set.

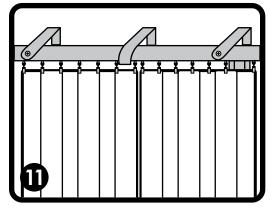

In the closed position, start from each end of erodTM, attach drapery panel(s) using clips (or remove clips and attach pin hooks, sold separately). Work your way towards the center of rod, distributing clips or hooks evenly as you go. Overlap panels for privacy.

(Additional roller clips sold separately.)

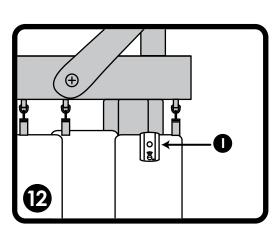



Clip remote sensor to front of panel (hiding cord behind drapery).


Frod motorized drapery hardware

SIDE OPEN CONFIGURATION

BEFORE INSTALLATION, UNPACK BOX AND LAY OUT CONTENTS:

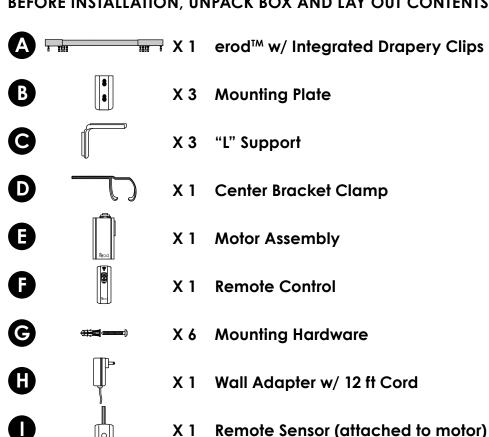





X 1 Rod Set Screw


Care Instructions: Clean with a soft cloth. Do not use abrasive cleaning agents, solvents, or polishes as they may damage the finish.

X 2 Rotating Side Bracket (attached to rod)


Estimated Assembly Time: Approximately 30 minutes

Tools Needed (not included): Drill with 3/16 in drill bit, Phillips screwdriver, Level (recommended)


How to Measure: To determine the appropriate drapery rod length, use a metal measuring tape to gauge the outside width of the window to be covered. Align ends of erod™ to outer edges of window.

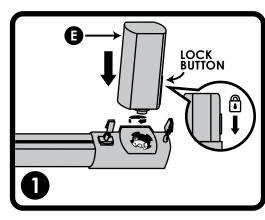


Lay erod™ on a flat surface with keyed slot facing upward. Insert motor assembly into keyed slot on rod end. Twist until gears are engaged and motor is seated into erod™ (lock button should align with stationary clip on end of rod). Slide lock button towards rod to lock motor assembly into place.

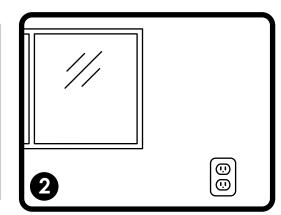

Orient motor on the side of the window where draperies will collect when fully opened. Locate closest wall outlet. (Battery Power Kit sold separately for use without wall adaptor.)

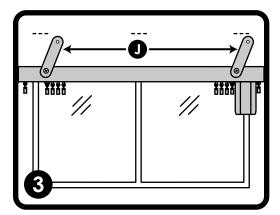


Extend rotating side brackets on erod™ toward wall and align ends of erod™ to outer edges of window. Using level and rotating side brackets, mark desired side and center mounting plate locations.

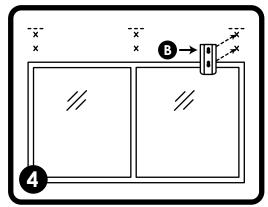


Align top of mounting plates to marked positions and mark hole positions. Make sure all 3 mounting plates are at the same horizontal level.


(NOTE: Some installations require special attachment methods and anchors. Only drywall anchors are supplied.)

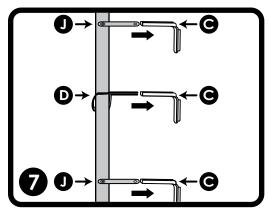


Place center bracket clamp near middle of erod™ and insert all three brackets into "L" supports on wall. Pinch center clamp tight onto rod and lock into place with top set screw.

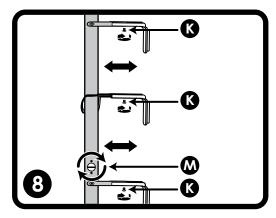


Determine the projection of the erod™ from the wall, then insert and tighten bracket set screws on bottom of all 3 brackets to secure. Place rod set screw in middle hole (of the three on top of rod). Use a coin to tighten rod set screw.

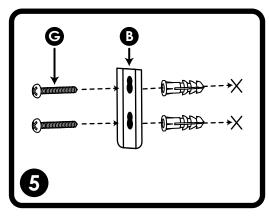


Drill anchor holes with 3/16 inch drill bit and insert wall anchors. Attach mounting plates to wall using screws provided.

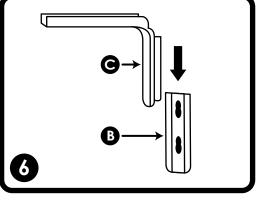

Slide "L" supports onto mounting plates.

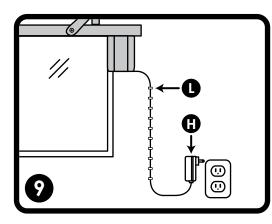


Plug wall adaptor into electrical outlet. Use cord guides to secure cord to wall.

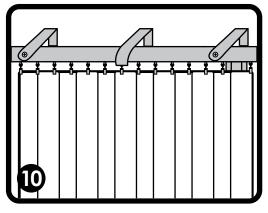

Starting from motor end of erod™, attach drapery panel(s) using clips (or remove clips and attach pin hooks, sold separately). Work your way towards the non-motor side of rod, distributing clips or hooks evenly as you go. Overlap panels for privacy.

(Additional roller clips sold separately.)

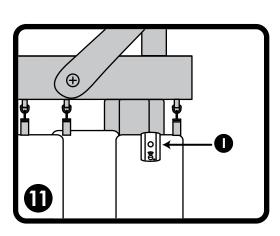

Clip remote sensor to front of panel (hiding cord behind drapery).